

HIGH FREQUENCY PNEUMATIC CONVENTIONAL MODELS SVR, SVRF



- Can be Designed to Start in Any Position
- High Frequency, High Force
- Patented Silent Design
- Patented “Air Saver” Chamber
- Patented Wear Plates

Vibco features two models: The “SILENT” and a “conventional “High Frequency Pneumatic Vibrator.”

HOW IT WORKS - A rotor spins around the shaft in the Conventional model or spins freely and silently in a circular race in the Silent Models. Additional muffler pads in the outer End Cover dampen the noise of the exhausting air.

CONVENTIONAL SVR Units are simple in design and low cost with a dB reading of 95 to 110. **SILENT SVRS** units perform with a dB reading of 80-85.

VIBCO Patented designs feature;

1. Will start **EVERY TIME** by just cracking the air line valve open. No blast of air is necessary.
2. The Patented **WEAR PLATE** between rotor and end cover is made out of spring steel and will not wear, assuring a long maintenance free operation, avoiding costly end cover repairs.



The SVRL Units shown here are being used to strengthen a concrete retaining wall. The Lug Bracket also shown, makes it an ideal solution for portability.

3. The Patented **AIR SAVER CHAMBER** does not exhaust all the compressed air before the next cycle which lowers the units air consumption.
- Ask for Catalog #0103 External Walls and Columns or Catalog #8401 Handbook & Equipment Guide External Concrete Vibration.


Technical Data

Model	Weight		80 PSI (5.5 Bar)			90 PSI (6.2 Bar)			100 PSI (6.9 Bar)			Cubic ft. /min.	Sound*
			Vibration /min.	Centrifugal Force		Vibration /min.	Centrifugal Force		Vibration /min.	Centrifugal Force			
	lbs.	kg.	VPM	lbs.	Newtons	VPM	lbs.	Newtons	VPM	lbs.	Newtons	CFM	dB
SVRFS-2000 SVRWS-2000	19 20	8.62 9.07	11,500	3,600	16,000	12,500	4,000	17,800	13,500	4,400	19,500	40	78
SVRFS & LS-4000 SVR-4000	22 23	10.0 10.4	11,500	3,600	16,000	12,500	4,000	17,800	13,500	4,400	19,500	40	78 90
SVRLS-5500 SRL-5500	43 33	19.5 15.0	9,000	4,950	22,000	10,000	5,500	24,500	10,500	6,100	27,100	56	78 82
SVRLS-6500 SRL-6500	45 39	20.4 17.8	8,800	5,575	24,800	9,500	6,500	28,900	10,000	7,200	32,000	58	80 98
SVRLS-8000 SVR-8000	47 51	21.3 23.1	8,500	7,625	33,900	8,700	8,000	35,600	9,500	9,550	42,500	62	82 98
SVRWS-4000	23	10.4	11,500	3,600	16,000	12,500	4,000	17,800	13,500	4,400	19,500	40	78
SVRWS-5500	60	27.5	10,000	4,950	22,000	10,000	5,500	24,500	10,500	6,100	27,100	56	82
SVRWS-6500	61	28.0	8,800	5,545	24,800	9,500	6,500	28,900	10,000	7,200	32,000	58	85

* Decibel from A-scale at 1 meter and 90 PSI.

NOTE: • Data obtained on laboratory test block
• Frequency and force will vary with quality of air, unit lubrication, and rigidity of mount
• Data subject to design changes

SILENT MODELS SVRS SVRFS, SVRLS, SVRWS

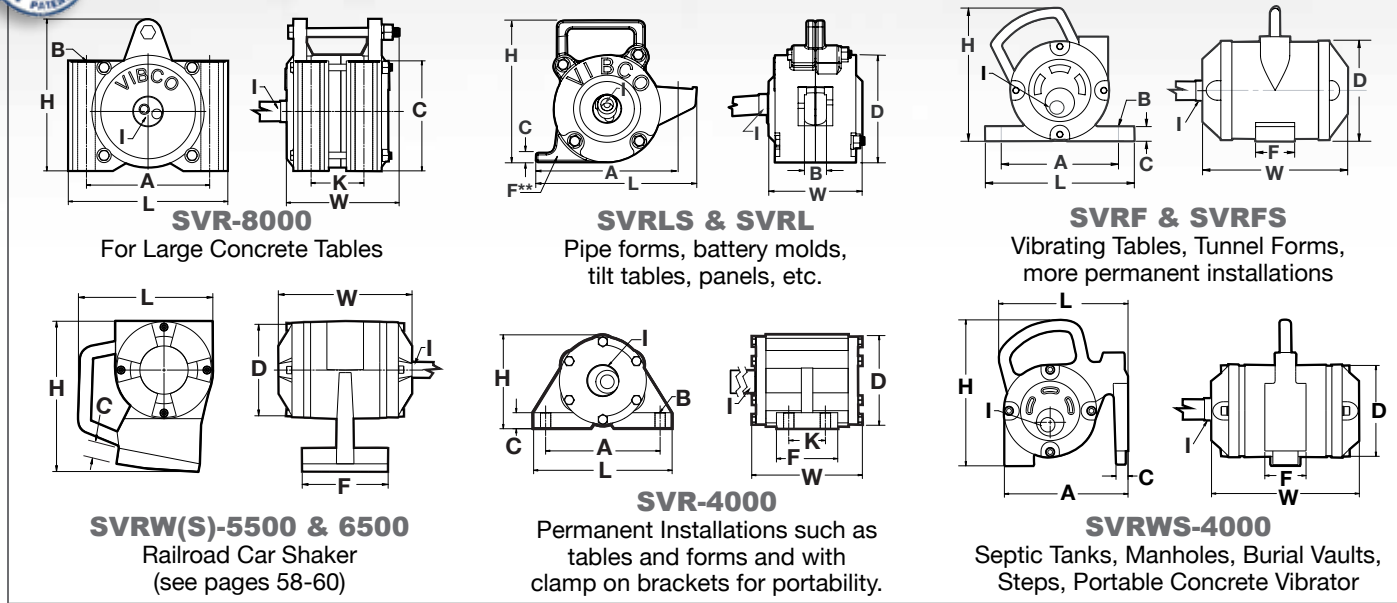

Dimensions

Model	L		W		H		A		B*		C		D		F**		K		I
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	SAE
SVR-4000	7-1/2	191	6-1/8	156	5	127	6-1/4	159	1/2	12	7/8	22	4-7/8	124	3-7/16	87	2	51	5/8-18
SVR-5500	7	178	6-1/16	154	7-3/8	187	7	178	-	-	3/4	19	5-3/8	137	3-1/2	89	-	-	5/8-18
SVRL-5500, 6500	9-1/2	241	6-1/8	156	9-1/4	235	8	203	1	25	3/4	19	6-1/2	165	1-1/4	32	-	-	5/8-18
SVRF-5500	10-1/4	260	6-1/8	156	8-1/8	206	8	203	3/4	19	1-1/8	29	5-3/8	137	3-1/4	83	-	-	5/8-18
SVR-8000	9-3/8	238	6-3/8	162	9	229	7	178	3/4	19	6-1/2	165	-	-	3-1/8	79	3-1/2	89	5/8-18
SVRFS-2000, -4000	7-11/16	195	7-3/8	187	7-1/8	181	6	152	11/16	17	3/4	19	5-1/8	130	2-1/16	52	-	-	5/8-18
SVRLS-2000, -4000	7	178	8	203	7-1/2	190	6	152	3/4	19	1/2	13	5	127	1-1/4	32	-	-	5/8-18
SVRLS-5500, 6500, 8000	9-1/2	241	8-1/16	205	9-1/4	235	7-3/4	197	1	25	3/4	19	6-3/8	162	1-1/4	32	-	-	5/8-18
SVRWS-4000	7-3/4	197	8-1/16	205	6-7/8	175	5-1/8	130	-	-	1	25	5-1/8	130	2-3/16	56	-	-	5/8-18
SVRW(S)-5500, 6500 Rail Road Car Shaker	8-5/8	219	8-5/8	219	9-7/8	251	11	279	-	-	1-1/8	29	6-1/8	156	5-1/2	140	-	-	5/8-18

* Max. mounting bolt diameter
** Foot width

NOTE: • Material, Dimensions & Data subject to change without notice
• Dimensions ±1/16"
• All units use a 3/4" hose with 5/8-18 SAE threads supplied by VIBCO